




60 FHL, Ratoath, Co. Meath Tel: +353 (0) 1 8254007 email:sales@ermalec.ie

Public Lighting Pillars

ESB Single phase unmetered pillar- Micro 250W x 150D x 940H

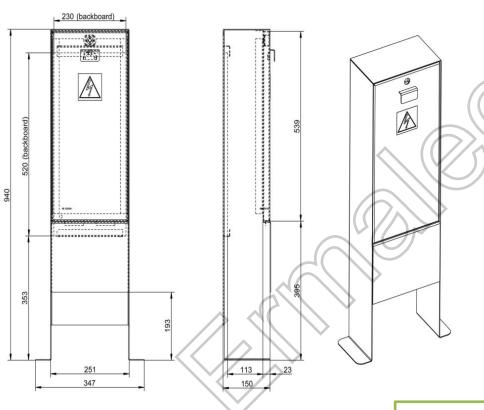



Specification:

- Designed to IP44
- Mounting Area 240 x 465
- Material manufactured from 3mm mild Steel
- Finish hot dipped galvanised to BS EN ISO 1460
- Base Sealed with Bituminised coating
- Backboard 12mm Flame retardant grade plywood treated with water repellent
- Fitted with 8mm Tri-Head locks
- Detachable door
- Earth Stud fitted as standard with earth strap & bolt, nuts & washers on both body & door

Options Available:

- · Back board grade-Marine Plywood
- Louvre panels
- Non standard sizes to customer specification
- Painted to Customer RAL number

Code: 9001






60 FHL, Ratoath, Co. Meath Tel: +353 (0) 1 8254007 email:sales@ermalec.ie


Public Lighting Pillars

ESB Three phase unmetered mini-pillar- 370W x 210D x 1040H











Code: 9002

Specification:

- Designed to IP44
- Mounting Area 350 x 470
- Material manufactured from 3mm mild Steel
- Finish hot dipped galvanised to BS EN ISO 1460
- Base Sealed with Bituminised coating
- Backboard 12mm Flame retardant grade plywood treated with water repellent
- Fitted with 8mm Tri-Head locks x 2
- Detachable door
- Earth Stud fitted as standard with earth strap & bolt, nuts & washers on both body & door

Options Available:

- · Back board grade-Marine Plywood
- Louvre panels
- Non standard sizes to customer specification
- Painted to Customer RAL number






60 FHL, Ratoath, Co. Meath Tel: +353 (0) 1 8254007 email:sales@ermalec.ie

Public Lighting Pillars

ESB Three phase 2 door metered pillar- 540W x 230D x 1600H (including plinth height)

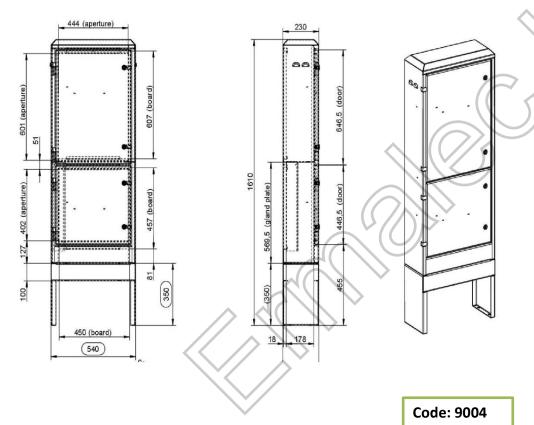



Specification:

- Designed to IP44
- Mounting Area **Top** 600 x 500. **Bottom** 450 x 500
- Material manufactured from 3mm mild Steel
- Finish hot dipped galvanised to BS EN ISO 1460
- Base Sealed with Bituminised coating
- Backboard 18mm Flame retardant grade plywood treated with water repellent
- Fitted with 8mm Triangular ¼ turn locks x 4
- Compressed rubber gasket on doors
- Top compartment separated by gland plate to bottom area.
- Earth Stud fitted as standard with earth strap & bolt, nuts & washers on both body & door
- Fitted with protective steel trunking and plastic glands for ESB Incoming supply to top section

Options Available:

- Back boards grade-Marine Plywood
- Louvre panels
- Non standard sizes to customer specification
- Painted to Customer RAL number


T diffical to Cast





Metering Pillars

ESB Three phase 2 door metered pillar- 540W x 230D x 1800H (including plinth height)

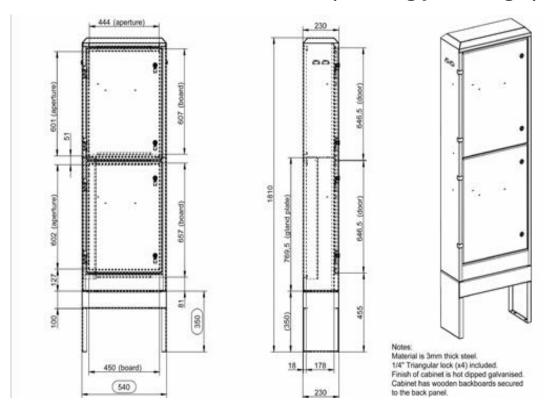



Specification:

- Designed to IP44
- Mounting Area **Top** 600 x 500. **Bottom** 600 x 500
- Material manufactured from 3mm mild Steel
- Finish hot dipped galvanised to BS EN ISO 1460
- Base Sealed with Black enriched coating
- Backboard 18mm Flame retardant grade plywood
- Fitted with 8mm Triangular 1/4 turn locks x 4
- Compressed rubber gasket on doors
- Top compartment separated by gland plate to bottom area.
- Earth strap & stainless door stays, bolt, nuts & washers on both body & door
- Fitted with protective steel trunking and plastic glands ESB Incoming supply to top LH section

Options Available:

- Back boards grade-Marine Plywood
- Louvre panels
- Non standard sizes to customer specification
- Painted to Customer RAL number

Code: 9013

